

NOTES:

ELECTRICAL:


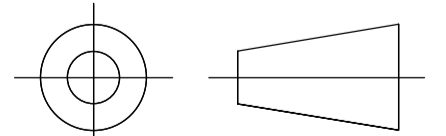
1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PBT;
2. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spcc1.6mm;
3. PCB MATERIAL:FR-4 T=1.6mm ;
4. IDC MATERIAL:PC , CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING ;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 22-26;

 TRIAx					
Material				Art. no.	157083
Angles Projection		Size	Scale	Unit	Part Name 24Ports Cat6 UTP Blank Patch Panel
		A4	X:1	mm	
Sheet	1 OF 1	Version: A/0		ERP Part No.	